

DEUTZ-FAHR 6135G - 6155G - 6175G - 6185G - 6205G AGROTRON





THE NEW 6G SERIES.
THE BEST TECHNOLOGY
MIX IN ITS CLASS.






6G SERIES AGROTRON		6135 G	6155 G	6175 G	6185 G		6205 G	
		Manual	Manual	Manual	Manual RC		Manual	RC
Rated Power	kW/HP	97/131	111/152	126/171	134/183		147/200	
Max. power	kW/HP	104/141	120/163	130/177	140/190		149/203	

With a choice of 5 new models with power outputs from 141 to 203HP, the new Deutz-Fahr 6G series answers the demands of customers in need of a tractor that not only delivers superlative productivity at an unbeatable cost, but also offers unparalleled ease of use and simplified

maintenance. Complete with stage 3A compliant 6 cylinder Deutz engines, matched with highly efficient ZF transmissions and classbeating hydraulics.



COMFORT AND FUNCTIONALITY WITHOUT COMPROMISE

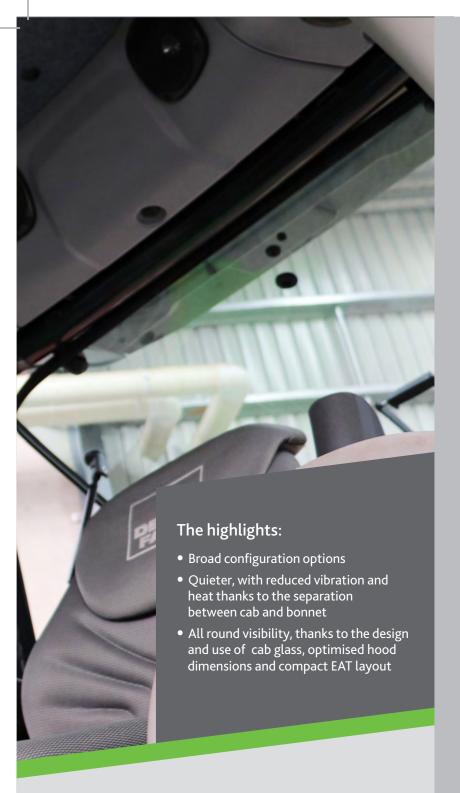

Deutz-Fahr has focused on creating a highly configurable driver zone that offers supreme ergonomics and comfort. The new PowerVision Cabin offers two configurations with Deutz-Fahr's distinguished colour coded operators platform. The right hand console features simple and clearly laid out controls that fall easily to hand for the operator. With two variants in transmission control, the smaller models feature a newly designed mechanical range lever with close gates for smooth and comfortable gear changes. On the larger models, the high-tech RC shift controller, similar to that found in the pro-series range is available as an option. As well as featuring a number of key controls on the controller, tractors spec'd with the RC-Shifter feature additional controls inset on the armrest.

The new Infocentre provides the driver with the clear, precise information needed to keep all operating parameters of these tractors under control at all times. Available also on the 6G series is the iMonitor 2 in an 8 inch



State-of-the-art dashboard cluster with new InfoCentre



Armrest controls - Summit specification (RC Transmission available for 6185G and 6205G only) $\,$




 $\label{lem:controls-Vista} \textbf{Armrest controls-Vista specification Manual Transmission}$





Air vents located throughout cabin.

version giving the operator full utilisation of the tractor and it's many features. 6G Series tractors may be automated even further with the addition of the Agrosky satellite guidance system, which, with an improved accuracy of just 2cm, possesses the extreme precision necessary for automated control.

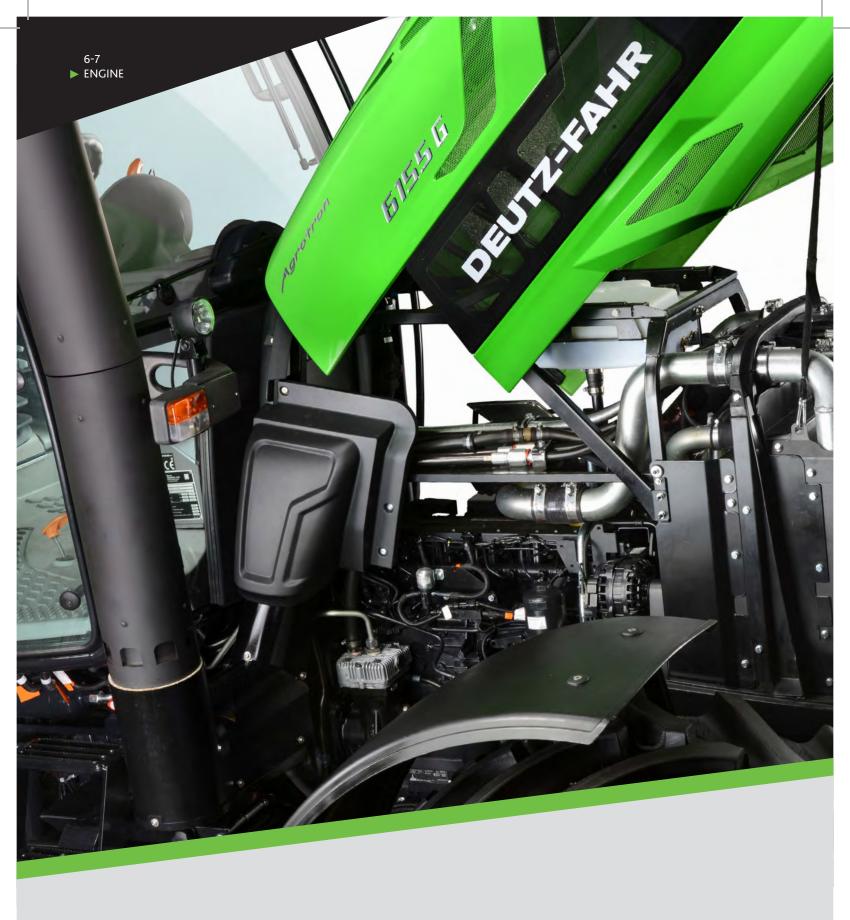

SUPERB POWER AND ECONOMY

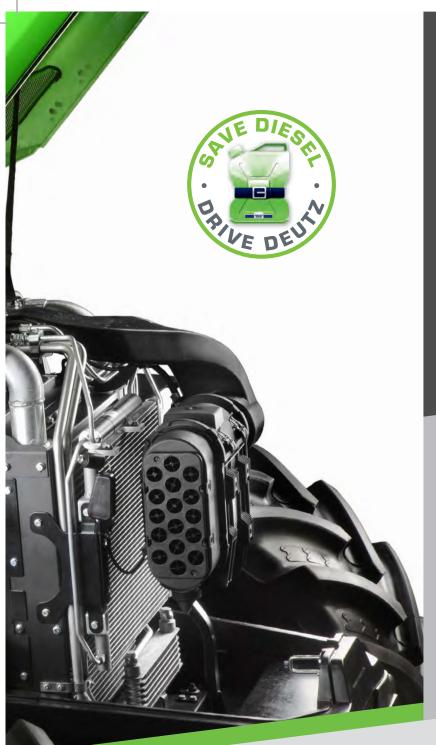

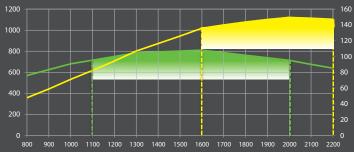

ADVANTAGES (6205 G)

- 96% of max power already available from 1,600 rpm
- 900 rpm of constand torque (from 1,100 to 2,000 rpm): almost the max torque available for the full range of use of the engine.

The highlights:

- Latest version of the proven Deutz 2012
 TCD Engine
- Deutz Common Rail (DCR) with twin oil lubricated injection pumps
- Electronic engine control unit
- Wastegate turbocharger maintains optimum turbo pressure throughout a wider RPM scale
- Tier 3A engine minimises engine additives and components

The new 6G series features the Deutz TCD 2012 engines. The tractors combine the highly efficient tier 3 engines with an intercooler and wastegate turbo-charger, an optimised position of the injector in the head, a high filtration capacity Donaldson PowerCore air filter and an all-aluminium cooling system. By doing so, the 6G is able to maximise power and productivity with lower fuel consumption meaning more time spent in the field.

Deutz-Fahr use a number of intelligent technologies designed specifically for the agricultural industry, aimed at increasing performance and lowering fuel consumption. Through the combination of electronic engine control and the Deutz common rail engine technology, the 6G series tractors are able to provide power on demand while at the same time, reducing fuel consumption.



MORE SPEEDS MEAN MORE POWER AND FEWER INTERRUPTIONS



6G Series tractors come standard with a hydraulic reverse shuttle, the ComfortClutch push button, the Stop & Go function and a 6 speed Powershift gearbox and SpeedMatching, combined with 5 manually selected ranges to offer a total of 30 forward speeds and 15 reverse speeds. As an option, these models may also be equipped with a creeper gear providing a minimum ground speed of just 370 meters per hour. The longer 5th range gives the tractor a theoretical top speed of 75km/h, making it possible to drive the tractor at top speed (40 or 50 Km/h) at super-economy engine speed.


RC-shift versions feature automated powershift and range shifting capability, with proportional selector valves and exclusive transmission management developed in-house by DEUTZ-FAHR offering a user experience almost identical to the VRT transmission while still ensuring the superlative fuel economy typical of Powershift range gearboxes.


With a minium of 2 overlapping Powershift speeds, only an 18% speed shift to the next gear and 17 gears in the main working range (5-20 km/h), the perfect speed for the job is always available. The closely grouped Powershifts mean more accurate speed control and a massive 6 Powershifts in each range mean fewer power interruptions due to the lack of range changes required.




50 Km/h SuperECO. Maximum speed with minimal engine rpm saves fuel.


6G transmission speeds





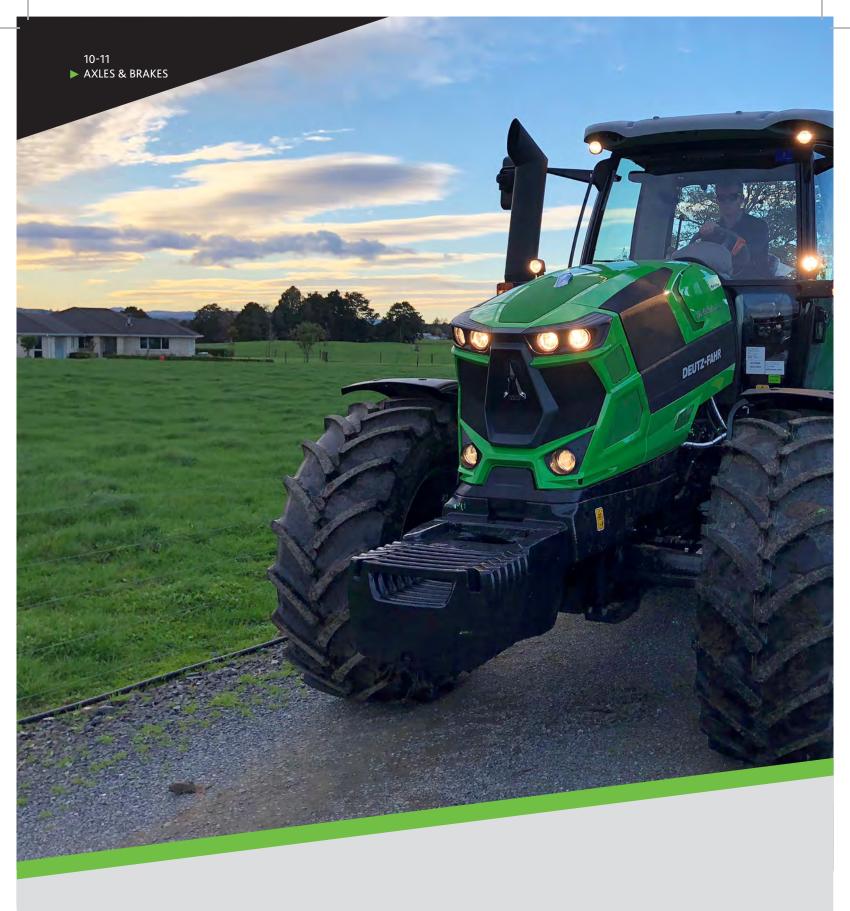


NO COMPROMISE WHEN IT COMES TO OPERATOR SAFETY AND COMFORT IN THE FIELD

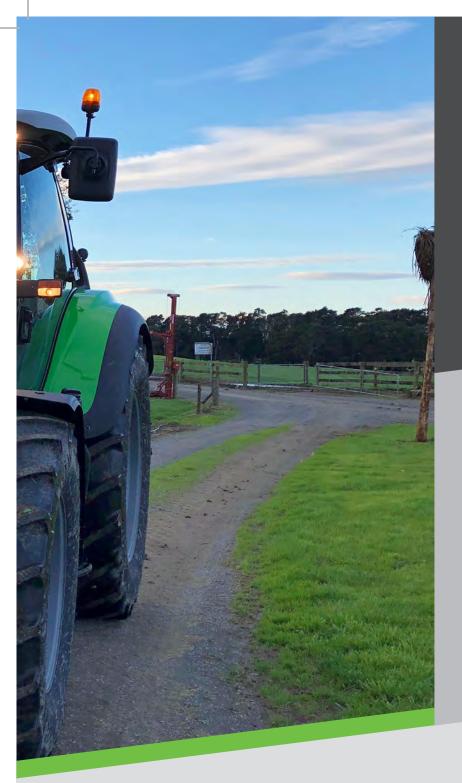

The highlights:

- Unique front axle with electronically controlled suspension
- Maximum stability in all working conditions
- Outboard dry disc brakes
- Booster brake system



Electronic adaptive suspension incorporating an Anti-Dive and Anti-Rise system. The suspension can be used in the field and on the road. Fully lockable when needed.

New to the 6G series is the all new front axle suspension option, adapted from the professional series of tractors. The suspension is designed to maintain a neutral position even when there is a load on the FEL/Front Linkage. The Neutral position is exactly halfway between the upper and lower limites of the cylinder. This is achieved by Deutz new auto-leveling technology. By maintaining a neutral position, when the tractor does encounter shock or uneven ground, the front axle is better equipped to dampen the impact through the entire 120mm of travel.

As compared to a conventional system, when there is a load on the front axle, the suspension is already semi-compressed meaning the suspension is less capable of dampening sudden jolts or shock. Additionally, the auto-levelling system reduces excessive wear due to over extension/compression of the cylinder. Similairly, when the tractor comes under heavy braking, the suspension system locks itself in place, preventing the cylinder from compressing.



HIGH DEMANDING IMPLEMENTS REQUIRE A HIGH PROVIDING TRACTOR



The highlights:

- Pump sizes ranging from 84 l/min to 165 l/min
- Open Centre and Closed Circuit Load Sensing options available
- Rear linkage up to 9,700 KG lift capacity
- Optional Sauter front linkage available
- Hitch controls on both rear fenders




External rear lift and PTO remote controls from each side.

With implements getting bigger, heavier and more demanding, operators are asking more of their tractor, the new 6G tractors from Deutz are more than up to the task. With a number of hydraulic pump configurations, up to 4 mechanical remotes and a rear lift capacity ranging from 6,200 KG through to 9,700 KG, the 6G is designed to handle even the most demanding of implements with ease. Electronic lift control gives accurate and simple to operate hitch control and allows the operator to move through the entire lift range with one press of a button.

All 6G series tractors feature an independant 42 l/min hydraulic pump for the steering meaning no power is lost at the wheel when working an implement. Load sensing and Power Beyond are standard on tractors configured with a closed centre load sensing hydraulic pump.



FORM FOLLOWS FUNCTION.
BOTH FOLLOW THE NEEDS
OF FARMERS.

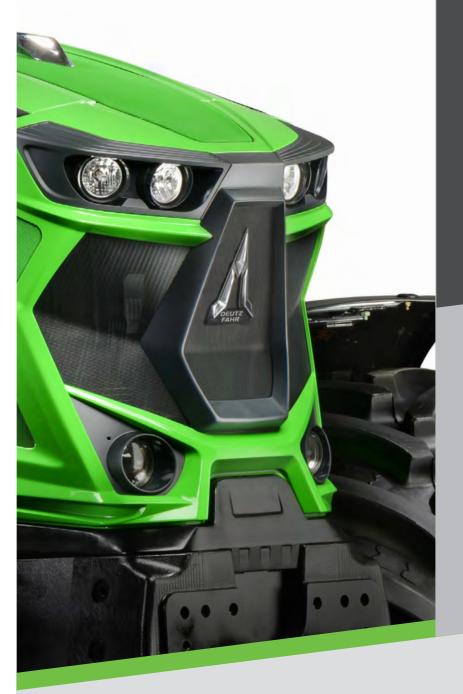



Front halogen lights fitted as a standard.



No connection between cab and engine hood - improved driver comfort.

The new 6G series from Deutz-Fahr feature the new family styling found on the Professional 6 and 7 series tractors. Available with either halogen or LED lights to ensure farmers can make the most out of the day and night. For the 6G series, Deutz have collaborated with leading vehicle design company Italdesign Giugiaro, one of the most influential vehicle design companies of recent times. With a major focus on both functionality and style, the 6G series ticks all the boxes.

Some key design features of the new 6G tractors include the space between the engine compartment and the cabin, keeping cabin noise

and heat transferred to the cab at an all-time low while enhancing overall operator comfort, and the relocation of the airconditioning unit in the roof of the tractor allowing it to perform even in the harshest conditions and increasing ease of servicability. The style and functionality is not only limited to the exterior of the tractor, with the new Powervision cab featuring premium materials and a clear ergonomic layout of controls and information.

				6G SERIES		
TECHNICAL DATA		6135G	6155G	6175G	6185G	6205G
ENGINE						
Manufacturer		Deutz	Deutz	Deutz	Deutz	Deutz
Model Emissions		TCD 2012 L06 2V	TCD 2012 L06 2V			
Internal EGR		Stage III A	Stage III A	Stage III A	Stage III A	Stage III A
Cylinder / Displacement	No./cm³	6/6057	6/6057	6/6057	6/6057	6/6057
Turbo intercooler	140./ СП	•	•	•	0,0031	0,0031
Wastegate valve		•	•	•	•	•
Deutz Common Rail (DCR)	bar	1600	1600	1600	1600	1600
Power at rated engine speed (ECE R 120)	kW/HP	97/131	111/152	126/171	134/183	147/200
Max. power (ECE R 120)	kW/HP	104/141	120/163	130/177	140/190	149/203
Maximum torque	Nm	599	659	730	770	810
Engine speed at maximum torque	rpm	1400	1400	1600	1600	1600
Torque rise	%	36	33	26	32	27
Air filter with PowerCore	litres	250	250	250	• 345	345
Fuel tank capacity (standard) Additional tank capacity (optional)	litres	95	95	95	345	345
TRANSMISSION	lities	33	33	93	-	-
Manufacturer	_	ZF	ZF	ZF	ZF	ZF
Model (Manual / Full Robotized)		TPT16 / -	TPT16 / -	TPT18 / -	TPT18 / TPT18 RCshift	
Number of speeds (5x6)	No.	30+15	30+15	30+15	- /30+15	- /30+15
Number of speeds with supercreeper gear (5x6)	No.	54+27	54+27	54+27	- /54+27	- /54+27
Powershift number of speeds (Forward/Reverse)	No.	6/3	6/3	6/3	6/3	6/3
Minimum speed with supercreeper gear	km/h	0,37	0,37	0,37	0,41	0,41
Max speed (5x6)*	km/h@rpm	40@1575 / 50@1969	40@1575 / 50@1969	40@1575 / 50@1969	40@1490 / 50@1863	40@1490 / 50@18
Max speed (5x6 RCshift)*	km/h@rpm	-	-	-	40@1158 / 50@1447	40@1158 / 50@14
Automatic Powershift (APS)		0	0	0	•	•
PTO						
PTO 540/540ECO/1000/1000ECO		•	•	•	•	•
AUTO PTO		•	•	•	•	•
Front PTO 1000		0	0	0	0	0
AXLES AND BRAKES				_		
Limited slip (45%) diff. lock		•	•	•	•	•
Front axle with 100% diff. Lock		0	0	0	0	0
Electrohydraulically operated differential lock and 4WD (ASM) Four-wheel braking system with automatic 4WD engagement		•	•	•	•	0
Powerbrake		•	•	0		
Mechanical parking brake		•	•	•	•	
Hydraulic trailer braking valve		0	0	0	0	0
Pneumatic trailer braking valve		0	0	0	0	0
Adaptive front axle suspension		0	0	0	0	0
Steering pump capacity	l/min	42	42	42	42	42
Steering angle		52°	52°	52°	52°	52°
HYDRAULIC SYSTEM						
Fixed displacement pump (standard)	l/min	84	84	84	90	90
Fixed displacement pump (optional)	l/min	110	110	110	115	115
Variable displacement pump (Load Sensing) (standard)	l/min	120	120	120	125	125
Variable displacement pump (Load Sensing) (optional)	l/min	160	160	160	165	165
Auxiliary rear mechanical distributors (standard)	No.	2	3	4	4	4
Auxiliary rear mechanical distributors (optional)	No.	3/4	4			
Power beyond		0	0	0	0	0
LIFT Electronically controlled rear lift		•	•		•	•
Rear lift capacity, two external cylinders 80 mm (standard)	le =	6200	6200	• 6200	6200	6200
Rear lift capacity, two external cylinders 80 mm (standard) Rear lift capacity, two external cylinders 100 mm (optional)	kg kg	9700	9700	9700	9700	9700
Controls on mudguard	kg	9700	9700	9700	9700	9700
Front lifting capacity	kg	3850	3850	3850	3850	3850
CAB	ng.	3030	5030	3330	5550	3030
PowerVision Cab		•	•	•	•	•
iMonitor ² (8")		0	0	0	0	0
Mechanical cab suspension		•	•	•	•	•
Air conditioning		•	•	•	•	•
Telescopic external mirrors		•	•	•	•	•
Halogen work lights		•	•	•	•	•
LED work lights		0	0	0	0	0
DIMENSIONS AND WEIGHTS						
With front tyres		540/65R28	540/65R28	540/65R28	540/65R30	540/65R30
With rear tyres		650/65R38	650/65R38	650/65R38	650/65R42	650/65R42
Wheelbase (fixed / suspended)	mm	2820 / 2767	2820 / 2767	2820 / 2767	2820 / 2767	2820 / 2767
Length (min-max)	mm	4710 - 6055	4710 - 6055	4710 - 6055	4710 - 6055	4710 - 6055
Height (min-max)	mm	2932 - 3171	2932 - 3171	2932 - 3171	3032 - 3221	3032 - 3221
Width	mm	2543	2543	2543	2541	2541
Ground clearance (min-max)	mm	654 - 722	654 - 722	654 - 722	704 - 772	704 - 772
Total unladen weight (min-max)	kg	6267 - 7307	6267 - 7307	6267 - 7307	6657 - 7704	6657 - 7704
Maximum permissible total weight	kg	11500	11500	11500	12500	12500

 $^*\mbox{Max}$ speed of 50 km/h where permitted. Max 40/50 km/h at low rpm according to tyres size.

STD • OPT ○ Not available -



P +64 (7) 902 2200 **W** www.deutztractors.co.nz 86 Thames Street, Morrinsville 3300, New Zealand

